



Miller Edge Model ME-120

Overview

When touch activated, these pressure sensitive edges immediately send an electrical impulse to your controls to start, stop, and/or reverse operations. Designed for use in a wide variety of applications, these SensingEdges are extremely durable. They are resistant to water, flame, and common greases and oils.



Specifications

Color: black

Length: per specification to nearest ¼"

Sensitivity: 4 psi – standard

Activation: Orange arrows indicate direction of sensitivity

Lead wire: 10 ft. SJTO 18 gauge – standard

Wire outlet location: specify right-hand, left-hand, or end

Electrical diagram: 2 wire N.O. configuration


Electrical requirements: 24 volt AC/DC ½ amp

Contact element: Alumaglas®

Channel: black extruded PVC or Aluminum

Sensing edge: extruded flexible PVC

Temperature range: -30°F to +155°F

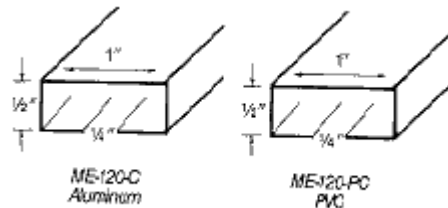

Distributed by:



C-Gate Entry Systems, Ltd.

419-843-2990

Sales, Service & Installation

www.cgateentry.com